

Receiver

Society
Reference
Address
Phone
Fax
E-mail

From

Item n° :

60122652

Model :

NOVA SALT W M-A

Pump data

Free passage : 5 mm

Pressure rating :

Min. fluid temperature :

Max. fluid temperature :

Max. Ambient temperature :

Requested data

Flow :

Head :

Fluid : Water

Fluid Temperature : 20 °C

Density : 998,3 kg/m³

Kinematic viscosity : 1,005 mm²/s

Vapor pressure : 2,34 kPa

Hydraulic data (duty point)

Flow :

Head :

Materials



Pump body Technopolymer
Impeller Technopolymer
Motor shaft Stainless Steel AISI 316
Filter Technopolymer
Motor casing Aluminium
OR ring NBR
V-RING NBR

Motor data

Motor brand : DAB
Nominal power P2 : 0,2 kW
Rated speed : 2.800 1/min
Rated voltage : 1~ 220-240 V
Nominal current : 1,3 A
Degree of protection : IP X8

50 Hz

Curve tolerance according to ISO 9906

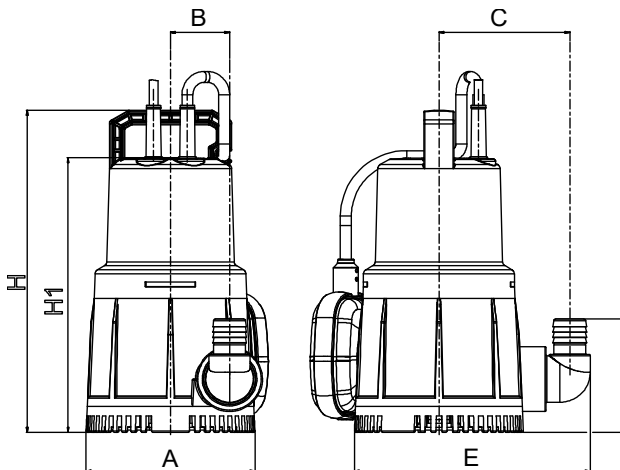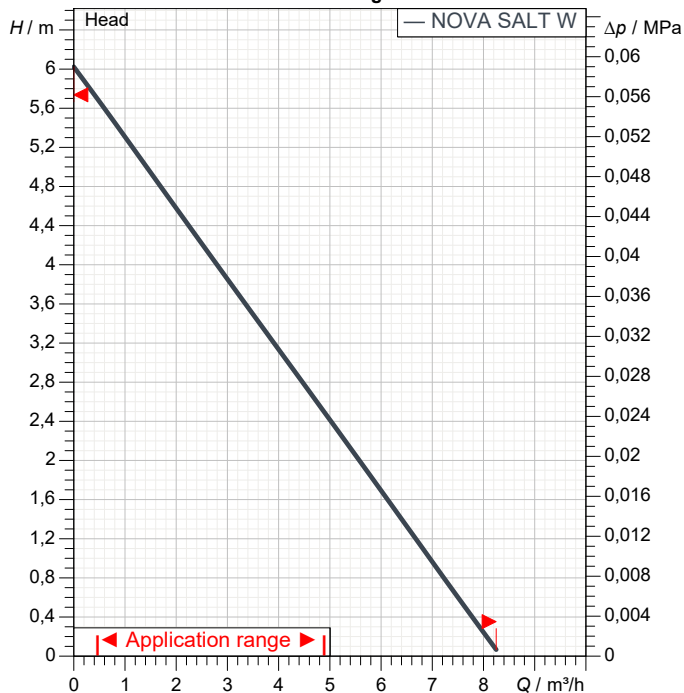

Weight : 0 kg

Dimensions in mm

A	140				
B	48				
C	107				
D	95				
E	195				
H	270				
H1	230				

Pump connection

Suction side : /
Discharge side : /


Receiver

From

Society
Reference
Address
Phone
Fax
E-mail

NOVA SALT W M-A

Curve tolerance according to ISO 9906

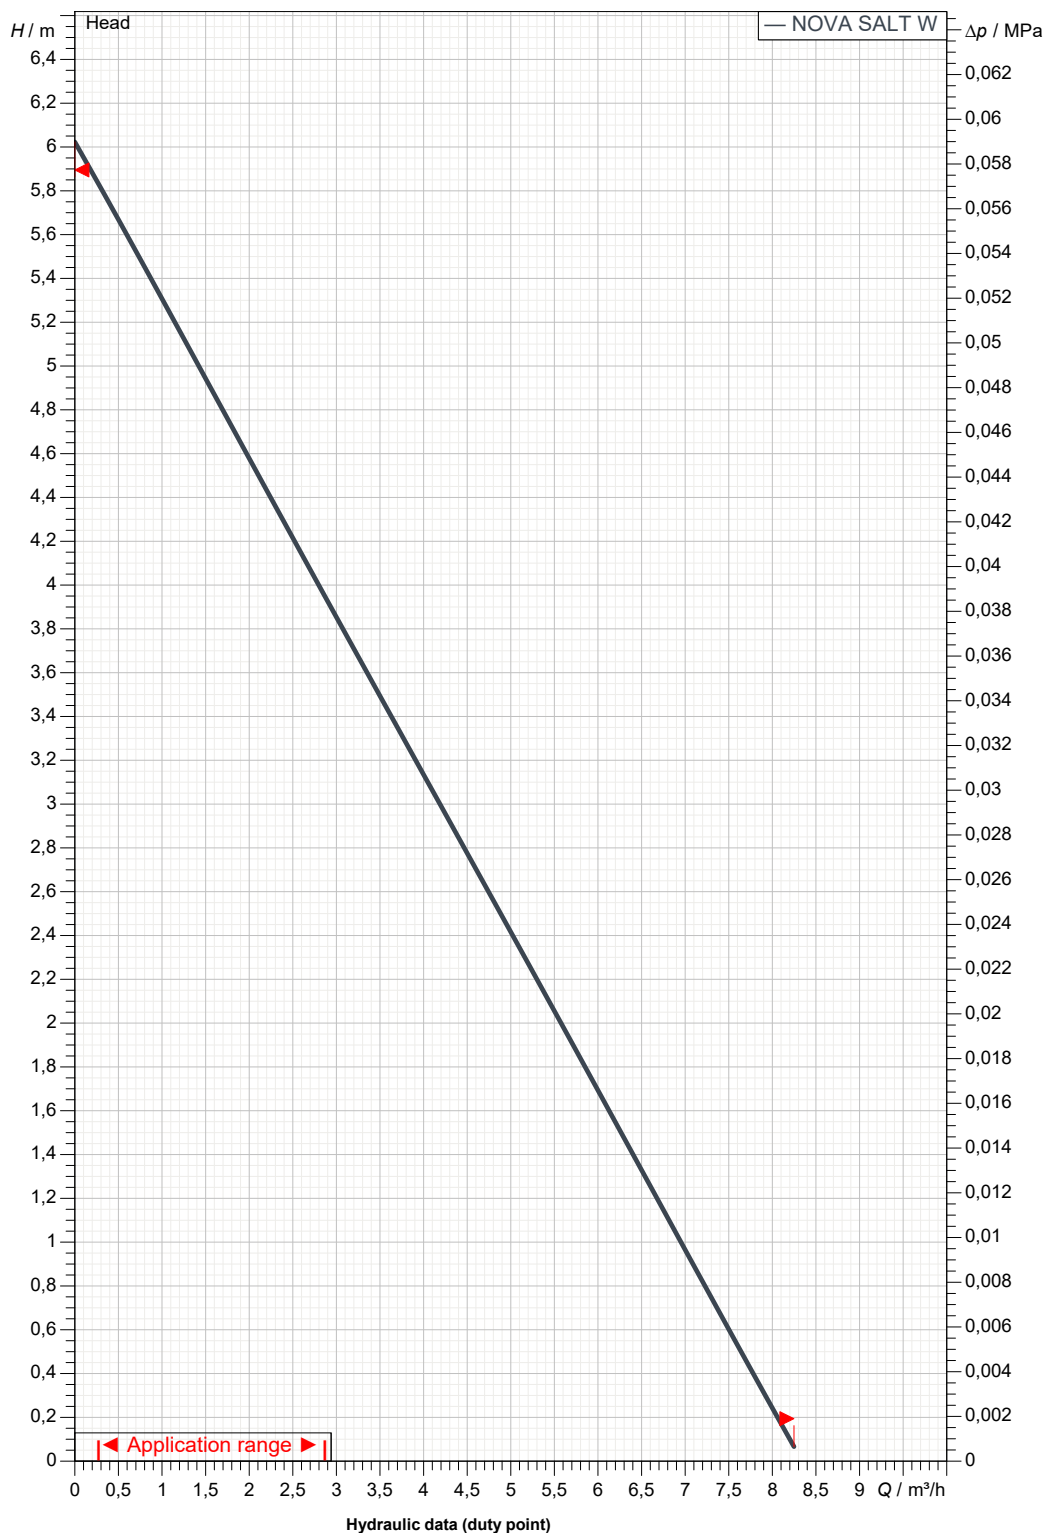

Suction side :

Discharge side :

Flow :

Head :

Rated speed :
2.800 1/min

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_IT

OWNER_

ISSUE_DATE



DIMENSIONAL DRAWING

2020-05-0€

Page 3 / 3


DAB PUMPS S.p.A.
Via Marco Polo, 14 - 35035 Mestrino (PD), Italy
Tel. +39 049 5125000 - Fax +39 049 5125950
www.dabpumps.com

Receiver

From

Society
Reference
Address
Phone
Fax
E-mail

NOVA SALT W M-A

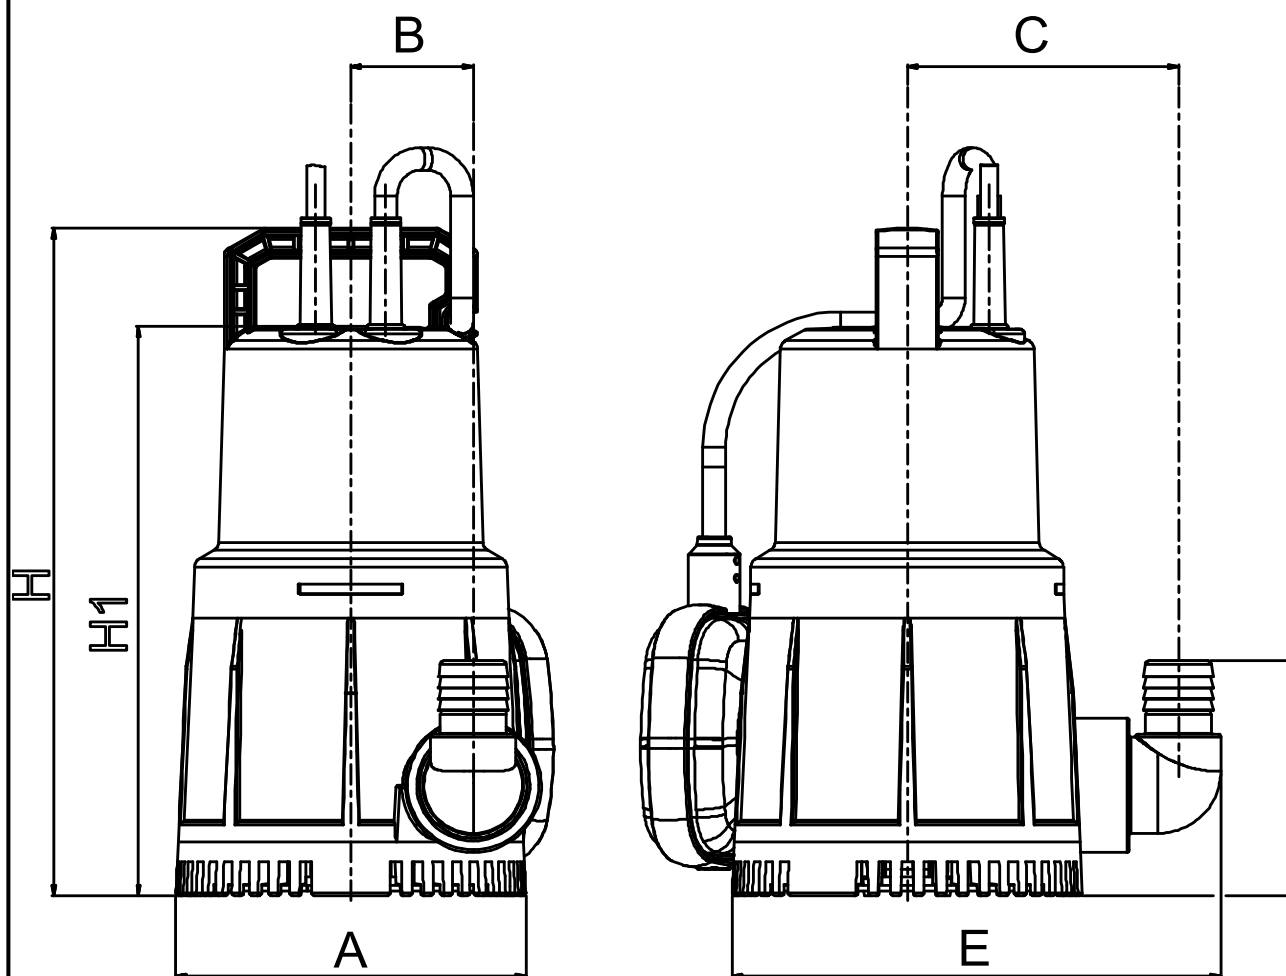

Dimensions in mm

Pump connection

1
2
3
4
5
6
7
8
9
10
11
12

A
B
C
D
E
H
H1

140
48
107
95
195
270
230

Suction

Discharge

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_IC

OWNER_

ISSUE_DATE